



Speaker Stand Assembly Instructions

for Nuance Stand model S-1


Step

Instructions

Illustration


1

Turn the speaker cabinet upside down on a soft cloth or on a carpeted floor so that the stand insert holes on the bottom of the speaker are facing up.

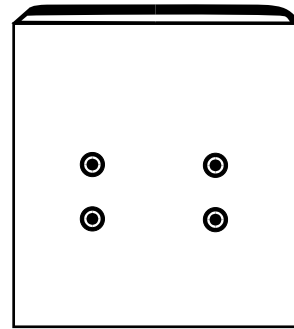

2

Take the “Single Post” and using four black screws, tighten the single post flat metal bracket into the four black insert holes on the bottom of the speaker cabinet.

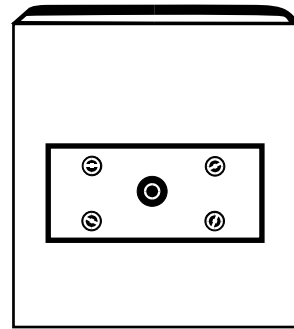


3

Place the “H-Base” carefully on top of the “Single Post” so that the large hole is facing down over the “Single Post”.

4

Take a silver screw and screw the “H-Base” into the post loosely. Line up one edge of the “H-Base” with the front of the speaker cabinet (while viewed from on top of the “H-Base”) then firmly tighten the screw.

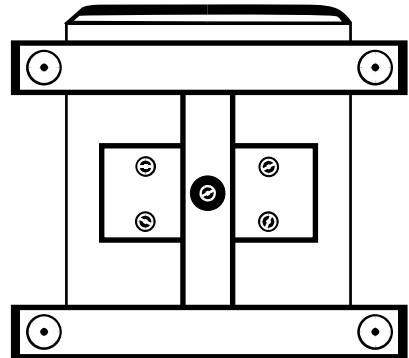

5

Place 1 flat lock washer under each Conical Support™ and tighten with a wrench. Please note that the Conical Supports™ are sharp and could scratch or dent the floor. If you would prefer plastic glides, they are available at no charge to Nuance stand customers. Please contact your Nuance dealer or Nuance directly for help at (905) 513-6600.

Each carton *includes*:
2 H-Bases, black.
8 Plastic end caps, black.
1 Instruction sheet

1 Polybag *containing*:
8 ¼ / 20 1” screws, black.
2 ¼ / 20 2” screws, silver.
8 Conical Supports™, black.
8 Flat lockwashers, black.