

Speaker Stand Assembly Instructions

for Nuance Stand models S-2, S-3, S-4


Step

Instructions

Illustration


1

Turn the speaker cabinet upside down on a soft cloth or on a carpeted floor so that the stand insert holes on the bottom of the speaker are facing up.

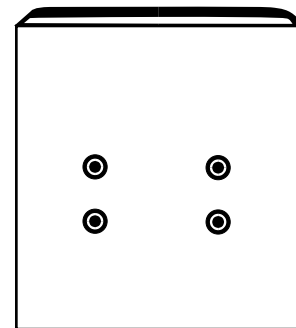


2

Take the “Double Post” and using four black screws, tighten the double post flat metal bracket into the four black insert holes on the bottom of the speaker cabinet. Make sure the “Double Post” is angled towards the rear of the speaker cabinet on models S-2 and S-4.

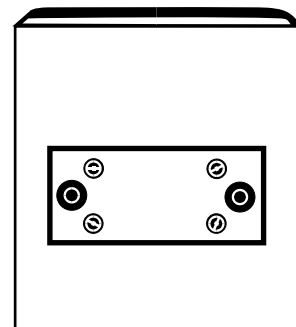

3

Place the “Double T Base” carefully upside down on top of the “Double Post” so that the two large holes are facing up.

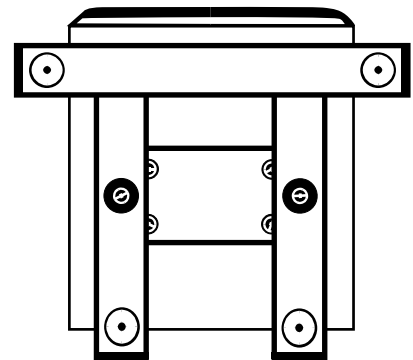

4

Take two silver screws and screw the “Double T Base” into the posts loosely until all screws are in place, then firmly tighten the two screws.

5

Place 1 flat lock washer under each conical and tighten with a wrench. Screw in the Conical Supports[™]. Please note that the Conical Supports[™] are sharp and could scratch or dent the floor. If you would prefer plastic glides, they are available at no charge to Nuance stand customers. Please contact your Nuance dealer or Nuance directly for help at (905) 513-6600.

