


nuance®



# Speaker Stand Assembly Instructions

for Nuance Stand model T3

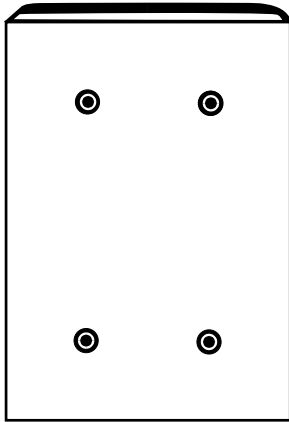


## Step 1

Turn the speaker cabinet upside down on a soft cloth or on a carpeted floor so that the stand insert holes on the bottom of the speaker are facing up.

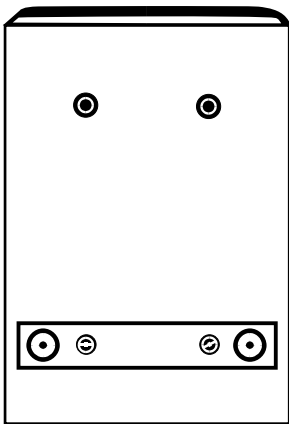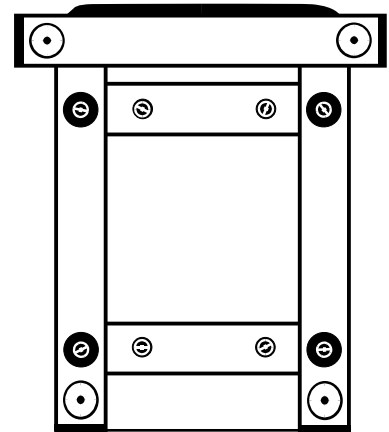

## Step 2

Take one of the "Double Posts" and using two black screws, tighten the double post flat metal bracket into the two black insert holes near the back of the speaker cabinet. While pushing the double post flat metal bracket towards the back of the speaker cabinet, firmly tighten the two black screws.

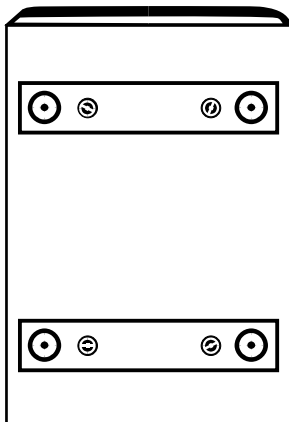

## Step 3

Take another "Double Post" and using two black screws, loosely tighten the single post flat metal bracket into the 2 black metal insert holes near the front of the cabinet.

## Step 4

Place the "Double T Base" carefully upside down on top of the four posts so that the 4 large holes are facing up.

## 5

Take four silver screws and screw the "Double T Base" into the posts loosely until all screws are in place, then firmly tighten all four screws.

## 6

Firmly tighten the front double post flat metal bracket.

## 7

Tighten all eight screws one more time.

## 8

Place 1 flat lock washer under each of the Conical Supports™ and tighten with a wrench. Please note that the Conical Supports™ are sharp and could scratch or dent the floor. If you would prefer plastic glides, they are available at no charge to Nuance stand customers. Please contact your Nuance dealer or Nuance directly for help at (905) 513-6600.

Each carton includes:  
2 Frame Assemblies, black.  
4 Double Posts, black  
8 Plastic end caps, black.  
1 Instruction sheet

1 Polybag containing:  
8 1/4 / 20 1" screws, black.  
8 1/4 / 20 2" screws, silver.  
8 Conical Supports™, black.  
8 Flat lockwashers, black.